Viburnum
Dianella
Lilly Pilly
Citrus Trees
700mm Capped and Cladded Partial Retaining Wall BOW 8.601 TOW 9.301
300mm Capped Limestone Retaining Edge BOW 8.916 TOW 9.216
Flax
Glass Mosaic or Sandstone Cladding as Splash Back
Existing BBQ Recess and Outdoor Kitchen
Flowering Plum
300mm Capped Limestone Planter Box BOW 8.601 TOW 8.901
Lilly Pilly
190mm Capped Limestone Retaining Edge BOW 8.601 TOW 8.791
Flax
2.2m Rendered Double Brick Screen Wall (400mm Partial Retaining Wall) BOW 8.500 TOW 10.716
Dragon Tree (Echeveria beneath)
1.2m Cladded Double Brick Screen Wall BOW 8.916 TOW 10.116
Glass Mosaic Tiles to Waterline
Potted Yucca
2.0m Screen Feature Wall (800mm Partial Retaining Wall) BOW 8.640 TOW 10.716
1.3m Recessed Horizontal Timber Screen
500mm Tiled Planter Box BOW 8.916 TOW 9.416
Agave (Echeveria beneath)
2.1m Rendered Double Brick Screen Wall (300mm Partial Retaining Wall) BOW 8.640 TOW 10.716
Low Long Trough Pots (Planted with Crassula)
Potted Standard Rose ' Angel Face '
500mm Colorbond Fence
430mm Double Rendered Brick Planter Box BOW 9.27 TOW 9.70
Dwarf Escallonia
Olive Tree
Dwarf Agapanthus
Beach Lily
880mm Cladded Brick Screen Wall 200mm Partial Retaining Wall (Stainless Steel Infill) BOW 9.49 TOW 10.37
Lavender
450mm Double Rendered Brick Retaining Wall BOW 9.00 TOW 9.43
500mm Colorbond Fence
Beach Lily
Advanced Frangipani (Star Jasmine beneath)
Escallonia
Dwarf Metrosideros
670mm Cladded Letterbox and House Number Plate BOW 9.70 TOW 10.37
430mm Double Rendered Brick Retaining Wall BOW 9.27 TOW 9.70
160mm Double Rendered Brick Planter Box BOW 9.27 TOW 9.43

6040
9760
45260
42000
15230
8.83
8.73
8.44
8.50
8.64
9.11
9.00
9.43
9.97
9.70
9.49
9.50
9.59
9.61
9.92
9.75
10.08
9.27
8.986
8.916
8.791
8.601
2.1m Rendered Double Brick Screen Wall BOW 8.600 TOW 10.716
Existing Twinside Retaining Wall
New 1.8m Colorbond Fencing
New 1.8m Colorbond Fencing
Paved Edge
LAWN
Cycads
Herbs + Vegies
Stepping Stones
PAVED (Exposed Aggregate)
Semi-Frameless Pool Fencing to Council Regulations
SAND PIT
Safety Gate
Pebbles
Pool Equipment
STORE ROOM
BBQ
ALFRESCO (Timber Decking)
POOL (Concrete)
Capped Pool Surround
Windows to Council Pool Regulations
CLOTHESLINE
RESIDENCE
Colorbond Gate
PORCH
Stainless Steel Gate
TERRACE (Timber Decking)
Spoon Drain
Star Jasmine
Paved Edge
SUNKEN LAWN
Ramp
PATH
Letterbox
Existing Concrete Footpath
Existing Peppermint
Agapanthus
DRIVEWAY
LAWN

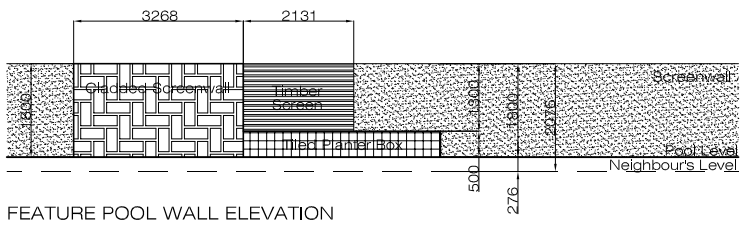

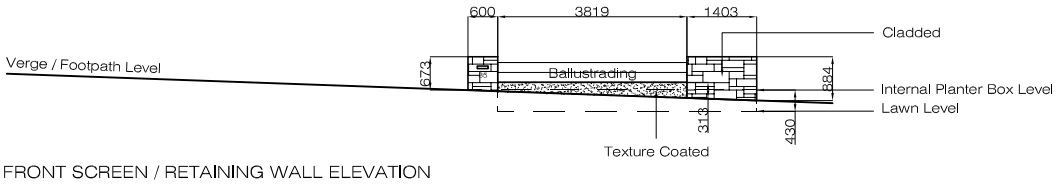

LIGHTING

- In-Garden Uplight
- Wall Mounted Down Light
- In-Paving Light

the Quarry DESIGN IN STONE

REVISED LANDSCAPE AND PLANTING PLAN2 JOB #70708
Anthony and Caterina Di Biase
35 The Grove
WEMBLEY
50B King Edward Road,Osborne Park Ph.9445 8333 Not to Scale Date 8/12/08

Disclaimer : This drawing is conceptual. Consult an engineer to confirm location of pools, retaining and screen walls and their heights , depths and structural requirements. All paving patterns, heights, levels and dimensions given are approximate only. Number of steps will vary dependant on finished site levels. Risers are not to exceed 190mm in depth. Check with your local council for location of underground services prior to commencement of works. Paved Areas that meet a building must be 70mm below finished floor level. Paved areas must slope away from buildings. Walls 500mm and higher require council approval and structural footing details.New structures require council approval. All works are to be measured on site prior to construction and scale given is approximate only.